


ROV ROCK drill

- Standard interface for SUB-fighter ROV 15k & 30k
- Hydraulic drill for Ø75 mm hole
- Neutral buoyant for easy ROV handling subsea
- Frame can be extended for long hole drilling
- Remote controlled from the ROV pilot console

ROV - ROCK drill specification	
Frame dimensions LWH	67 x 74 x 150 cm
Frame	Anodized AL6082-T6
Weight in air	150 kg
Weight in water	0 kg
Maximum hole diameter	75 mm. (3 inch)
Drill steels	Standard 800 mm. drill steel
Maximum working depth	300 meters standard. Other depths on request

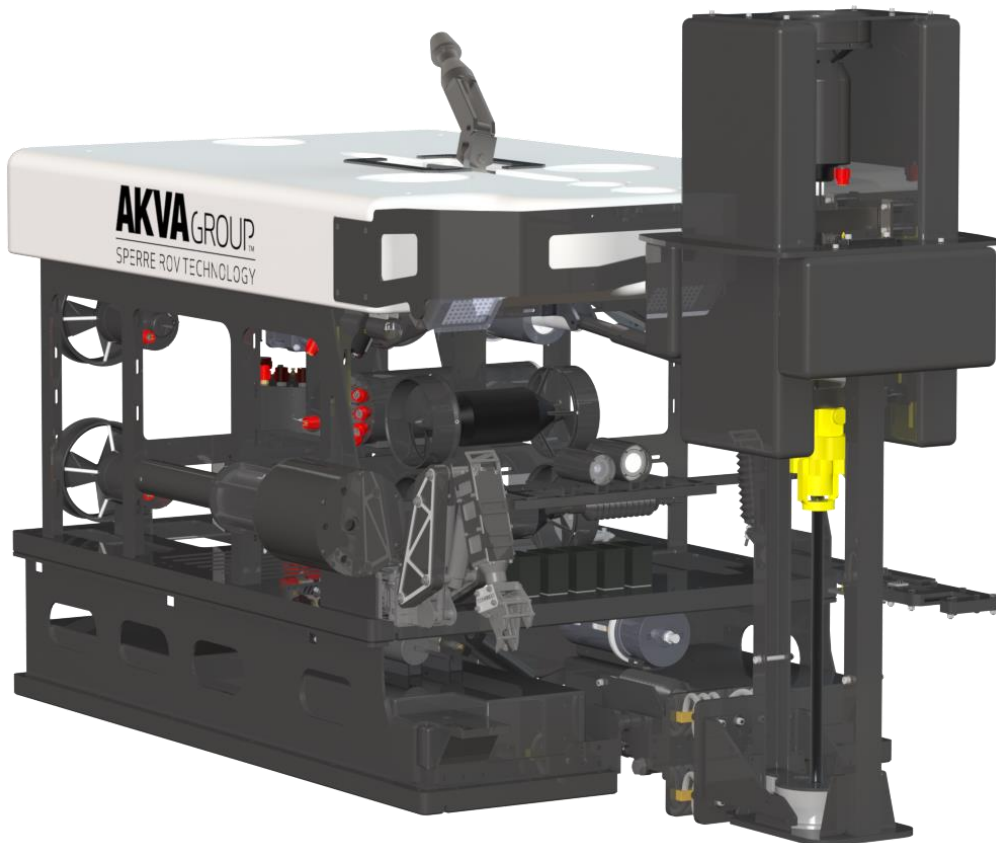

Sperre AS reserves the right to change prices and specifications without notice.
Sperre AS take reservations for errors and omissions in this data sheet.

DAT-075

Sperre AS – Telemark Teknologipark - Merdeveien 1 – 3676 Notodden, NORWAY

Email: post@sperre-as.com

Phone: +47 35 02 50 00

Web: <http://www.sperre-as.com>

